



CUSTOMER-INTEGRATED BLINKERSTOP®

SPECIFICATIONS

POWER	Flashing 12VDC or 120VAC
SIGN LEGEND	MUTCD Chapter 2B compliant; R1-1
SIGN SUBSTRATE	.080" highway grade aluminum
REFLECTIVE SHEETING	3M™ DG3 with anti-graffiti overlay
DIMMING	Fixed brightness
FLASH PATTERN	Dependent upon customer-provided controller
LED TYPE	Environmentally-sealed, high-power 1 watt LED
LED COLOR	Red
LED QUANTITY	8
LED LIFE EXPECTANCY	100,000 hours
VISIBILITY	Daytime: more than 1,000 feet Nighttime: more than 1 mile
ENCLOSED ALUMINUM CHANNELS	Protect wiring against inclement weather, tampering and vandalism
MOUNTING BRACKETS	Single post standard. Double post or Z-Bar available
MOUNTING HARDWARE	Various options available
OPERATING TEMPERATURE RANGE	-40°F to 122°F (-40°C to 50°C)
DIMENSIONS	24"W x 24"H x 1"D 30"W x 30"H x 1"D 36"W x 30"H x 1"D 48"W x 48"H x 1"D



12VDC

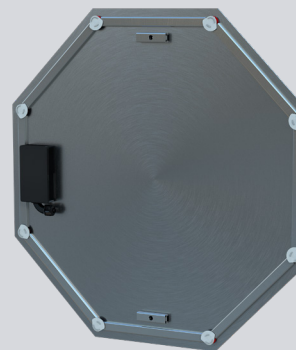

120VAC