

# IWS BLINKERBEACON™


## SPECIFICATIONS

<b>POWER</b>	Low voltage, current controlled from TAPCO controller
<b>DIMMABILITY</b>	Adjustable based on photocell or 6V solar panel input through TAPCO controller
<b>LED HOUSING</b>	Black or yellow polycarbonate
<b>LED VISOR &amp; DOOR</b>	Black polycarbonate standard; yellow available Cut visor standard; tunnel visor available
<b>VEHICLE LED MODULES</b>	12" round standard; 8" round available Adjustable rotation
<b>LED COLOR</b>	Amber or red
<b>FLASH PATTERN</b>	MUTCD-compliant options
<b>VISIBILITY</b>	Daytime: more than 1,000 feet Nighttime: more than 1 mile
<b>MOUNTING ASSEMBLY</b>	Aluminum painted to match LED housing
<b>MOUNTING HARDWARE</b>	Banding or bolts
<b>LIFE EXPECTANCY</b>	100,000 hours
<b>OPERATING TEMPERATURE RANGE</b>	-40°F to 165°F (-40°C to 74°C)
<b>DIMENSIONS</b>	8" - 11.2"W x 10"H x 12.5"D 12" - 14.8"W x 13.8"H x 17.2"D

FRONT



BACK

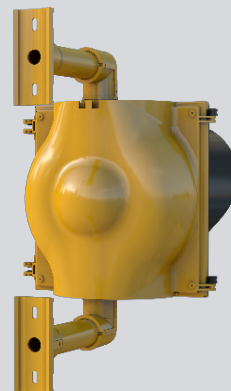

SIDE

